


PLAN VIEW

SECTION AA

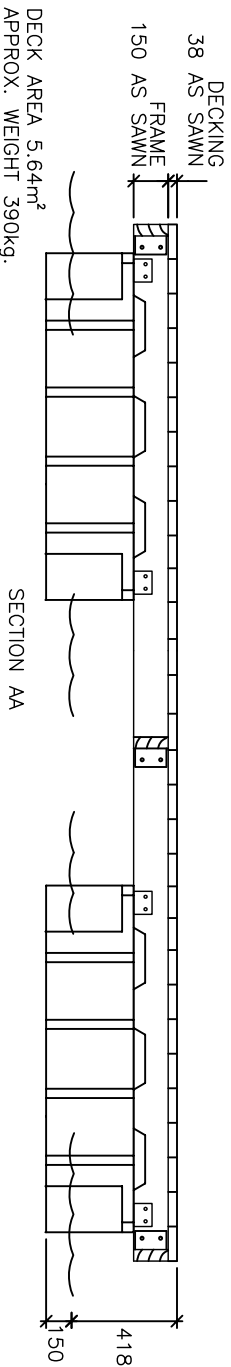

DECK AREA 5.64m²
APPROX. WEIGHT 390kg.

PART No.	ITEM	QTY.	REQD
737	3/8" BOLTx3 1/2"	8	
370	3/8" BOLTx3"	40	
372	1" WASHER	80	
296	1 1/2" WASHER	16	
571	3/8" NYLOC NUT	48	
729	DECK SCREW	124	
731	BUFFER SCREW	34	
367	CLEAT SCREW	0	
368	5/8" WASHER	0	
369	5/16" NYLOC NUT	0	

FOR ADDITIONAL ASSEMBLY DETAILS, REFER TO THE FOLLOWING DRAWINGS:

- FRAME BKT 1- A4-736
- FRAME BKT 2- A4-826
- FLOAT BKT- A4-732
- FLOAT AND DECK- A4-730
- CLEAT ASSEM- A4-717
- BUFFER ASSEM- A4-740
- CABLE BKT- A4-839

NOMINAL FREEBOARD NOT INCLUDING ANY ACCESS RAMP WEIGHT.

NOTE-ALL TIMBER IS TO BE TREATED WITH A SUITABLE PRESERVATIVE.

- (CREOSOTE, DECKING PAINT, ETC)
- ALL FASTENERS ARE CORROSION RESISTANT STAINLESS STEEL.
- ALL EXPOSED BOLTS ARE TO BE RECESSED INTO THE TIMBER BY COUNTER BORING.
- ALL BOLT THREADS ARE TO BE TREATED WITH ANTI-SIZE OR EQUIVALENT LUBRICATING COMPOUND PRIOR TO FASTENING.
- THIS DRAWING IS FOR A PONTOON OF TYPICAL DESIGN. ENGINEERING EVALUATION SHOULD BE PERFORMED FOR THE PONTOONS SUITABILITY FOR EACH PARTICULAR INSTALLATION.

