

WARNING—THIS FLOTATION MODULE HAS BEEN DESIGNED TO FORM PART OF AN INTEGRATED SYSTEM.

THE MODULES STRUCTURAL INTEGRITY, FLOTATION CAPABILITY, STABILITY AND OTHER PROPERTIES ARE A FUNCTION OF THE APPLIED LOADINGS AND THE METHOD OF THE MODULES MOUNTING AND APPLICATION.

MARINE DOCK SYSTEMS PTY.LTD. CANNOT GUARANTEE THE PERFORMANCE OF THIS MODULE UNLESS THE COMPANY PROVIDES WRITTEN ENGINEERING CERTIFICATION FOR ITS INSTALLATION.

MATERIAL—FLOTATION MODULES ARE MANUFACTURED BY ROTATIONAL CASTING.


—FLOTATION MODULES ARE MANUFACTURED FROM U.V. STABILISED, HIGH STRESS CRACK RESISTANT, LINEAR POLYETHYLENE.

—FOR POSITIVE RESERVE BOUYANCY, FLOATS ARE FOAM FILLED WITH CLOSED CELL POLYURETHANE

—STANDARD COLOUR— BLACK
—OTHER COLOURS ARE MADE TO ORDER.

—APPROX. WEIGHT.—120KG
—DUE TO THE MANUFACTURING PROCESS, FLOAT DIMENSIONS MAY VARY.

—ENSURE THE FLOAT IS SUPPORTED DOWN EACH 2 METRE SIDE AND NOT JUST ON THE MOUNTING LUGS
FOR TECHNICAL INFORMATION CONSULT
MARINE DOCK SYSTEMS. PH.(02) 9627 5577

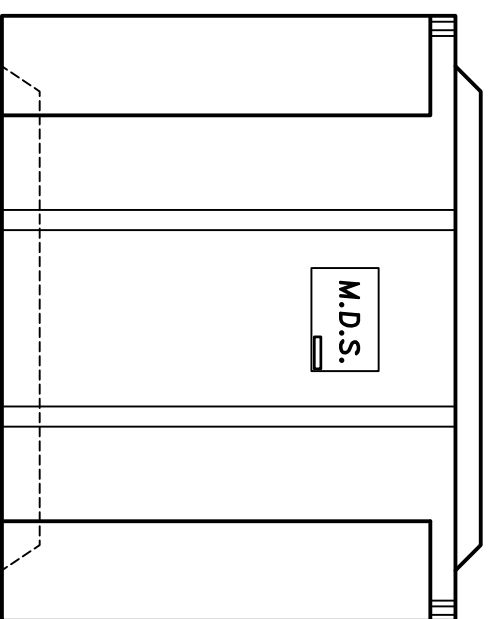

**MARINE DOCK SYSTEMS
PTY LTD**

**FLOTATION MODULE
2000 LITRE**

FLO2000—2728



SCALE	N.T.S.	DWG	A4-2728	
DRAWN	JPM	REV	A	21,2,02
DATE	21,2,02	CHK		APP'D